

1. Check if LED smartdongle is GREEN
(if LED is RED start troubleshooting internet)


2. Installation wizard with FusionSolar mobile App

3. Scan QR-code inverter en login in device by connecting to the wifi of the inverter (SUN2000 ...) password ' Changeme '



4. Login inverter

Username admin

Pass 00000a

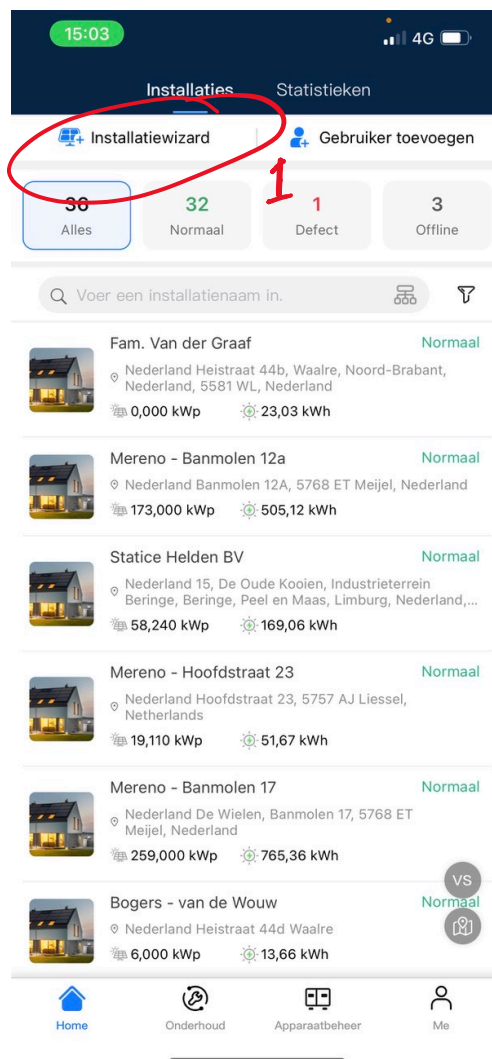

5. Abort searching Optimizer
6. Check if SdongleA light is green
7. Give permission
8. Cloud connection must be established to finish
9. After above steps inverter can be added to the FusionSolar portal as a new plant or added to existing plant

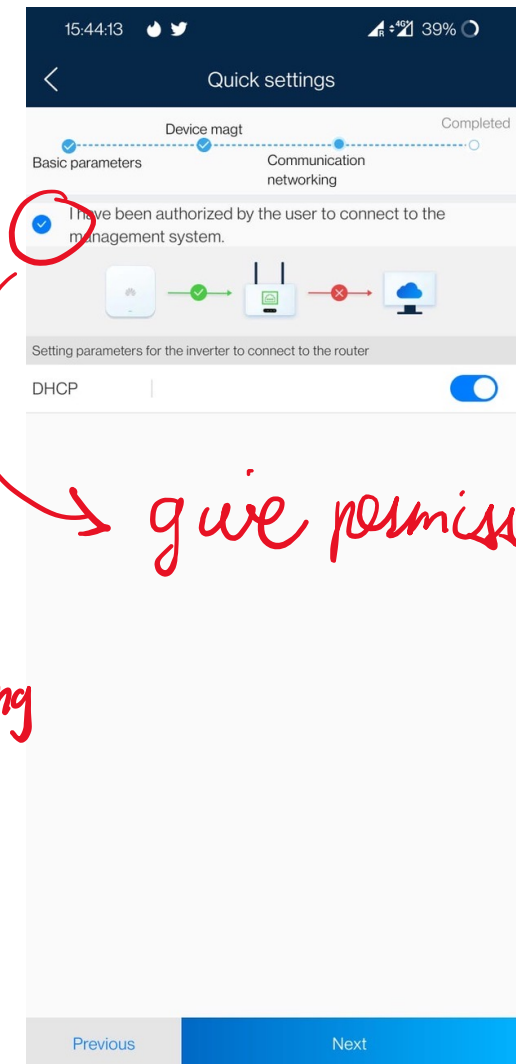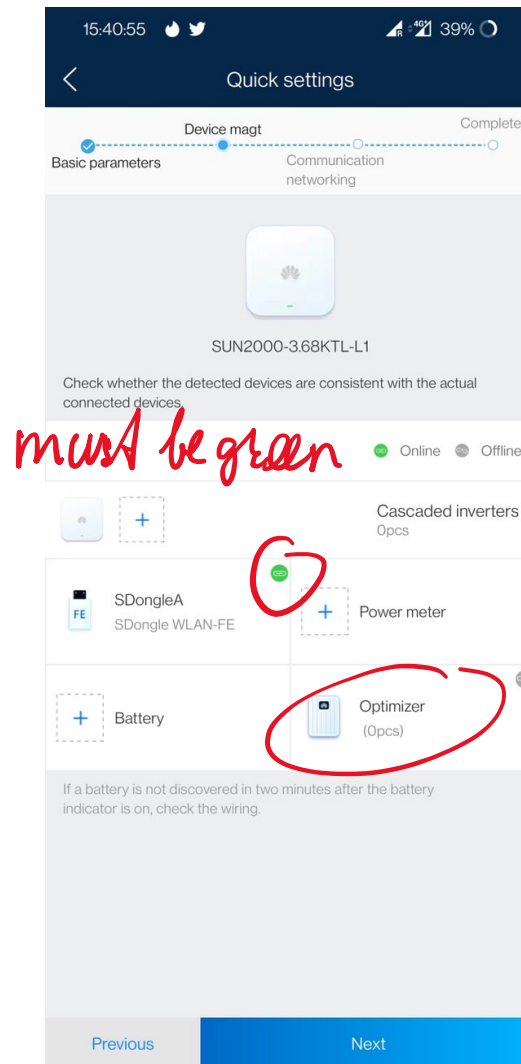

Troubleshooting internet

- Start at testing internet connection at the router. Unplug all internet cables and plug in your laptop with utp cable
- Check internet speed on speedtest.net
- Optional Ipconfig through terminal (Win+R, cmd, ipconfig)
- If internet connection is good, reconnect all cables and the new UTP cable of the inverter.
- Check at the inverter side with laptop if interconnection is working (speedtest.net)
- If internet at inverterside is not working, than replace RJ45 connectors, and if after that still not working, cable is broken